


YONE BALL VALVE

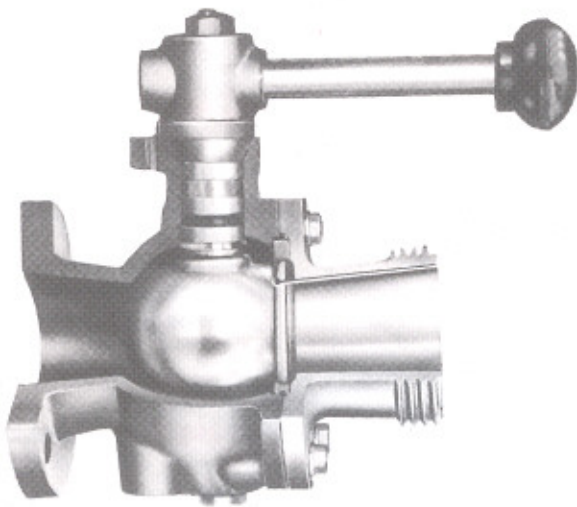


Unique Handle Lock System

Adjustment of flow rate would be done easily through the method of operation mentioned above.



- Seal function would proof for a long time against high pressure (factory test pressure 30kg/cm²G) and sudden release
- Material Main Body FC20, BC6

Hose Connection Port

We can meet the demand of hose couplings based on domestic and foreign standard including U.S.A., U.K and West Germany.

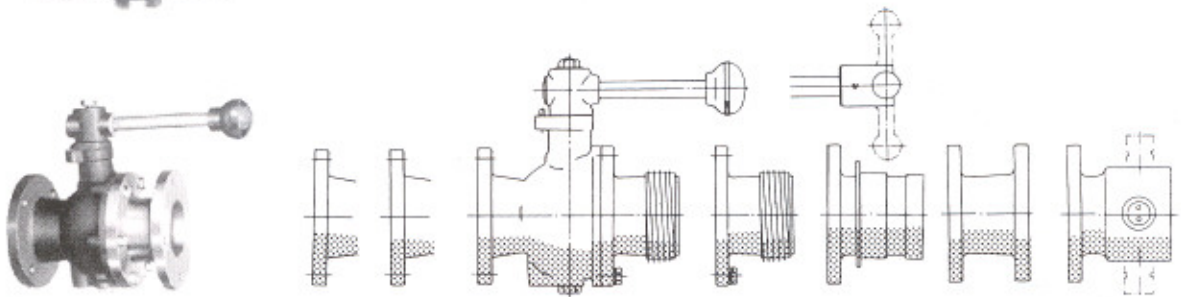

HOSE RACK

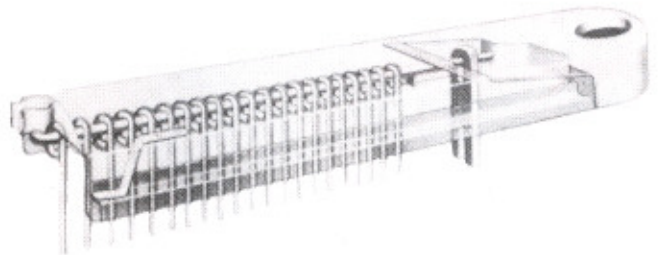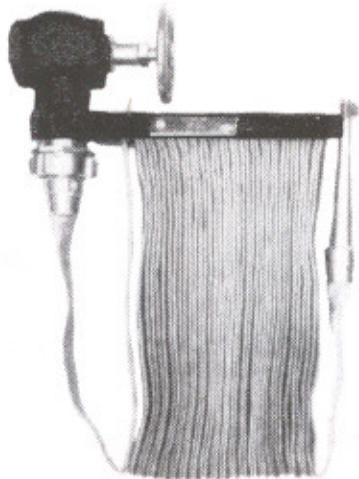

Hart Hose Rack

One piece construction, formed of 16 gauge steel - Rack pins, steel cadmium plated - pin stops flow until last fold of hose is removed - Capacity, 50-75-100 feet of hose.

Unit consists of the following material:

- Cast brass valve
- Cadmium plated steel escutcheon
- Hose rack with nipple
- Reducer
- Unlined linen hose / Rubberlined hose
- Coupling
- Smooth bore nozzle
- Available in 1½" and 2½" diameters